

ILA4661

BASEBAND DELAY LINE

GENERAL DESCRIPTION

The ILA4661 is an integrated baseband delay line circuit with one line delay. It is suitable for decoders with colour-difference signal outputs $\pm(R-Y)$ and $\pm(B-Y)$. Device is functionally identical to the TDA4661 Philips.

FEATURES


- Two comb filters, using the switched-capacitor technique, for one line delay time (64 μ S)
- 3 MHz internal clock signal derived from a 6 MHz CCO, line-locked by the sandcastle pulse (64 μ S line)
- Comb filtering functions for NTSC colour-difference signals to suppress cross-colour
- Clamping of AC-coupled input signals $\pm(R-Y)$ and $\pm(B-Y)$

QUICK REFERENCE DATA

Parameter	Symbol	Type $U_{VCC}=5.0$ V		
		Min.	Type	Max
Analogy supply current, mA	I_{p1}	-	-	6.0
Digital supply current, mA	I_{p2}	-	-	1.0
Input fixing voltage (on pins 14 and 16), V	$U_{14,16}$	1.3	-	1.7
Output voltage (on pins 11 and 12), V	$U_{11,12}$	2.5	-	3.3
Output signal (peak-to peak value) $\pm(R-Y)$ on pin 11 $\pm(B-Y)$ on pin 12	U_{011} U_{012}	- -	1.05 1.33	- -
Ratio of output amplitudes at equal input signals ($U_{14}=U_{16}=1.33$ V), dB	U_{11}/U_{12}	-0.4	-	0.4
Ratio of output signals on pins 11 and 12 for adjacent time samples at constant input signals ($U_{14}=U_{16}=1.33$ V), dB	U_n/U_{n+1}	-0.1	-	0.1
Gain for PAL and NTSC Gain for SECAM (ratio U_o/U_i), dB	G_v	5.3 -0.6	- -	6.3 0.4
Delay of delayed signals, μ S	t_d	63.94	-	64.06
Delay of non-delayed signals, nS	t_{dn}	40	-	80
Transient time of delayed signal on pins 11 respectively 12, nS	t_{tr}	-	350	-
Transient time of non-delayed signal on pins 11 respectively 12, nS	t_{tm}	-	320	-
Noise voltage (RMS value; pins 11 and 12), mV	U_n	-	-	1.2
Weighted signal-to-noise ratio, dB	$S/N(w)$	-	54	-

ILA4661

PIN CONFIGURATION

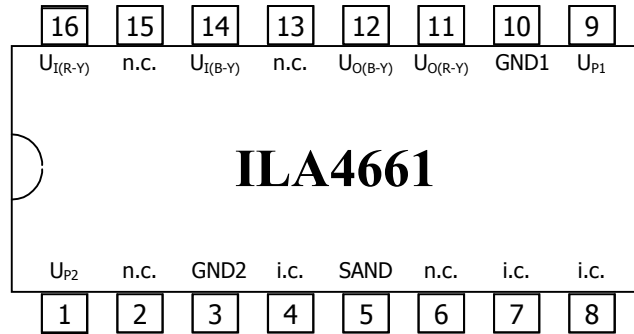

BLOCK DIAGRAM

