

OBEX OPP AND OBEX FTP PROFILES

iWRAP APPLICATION NOTE

Thursday, 27 May 2010

Version 1.0

Copyright © 2000-2010 Bluegiga Technologies

All rights reserved.

Bluegiga Technologies assumes no responsibility for any errors which may appear in this manual. Furthermore, Bluegiga Technologies reserves the right to alter the hardware, software, and/or specifications detailed here at any time without notice and does not make any commitment to update the information contained here. Bluegiga's products are not authorized for use as critical components in life support devices or systems.

The WRAP, Bluegiga Access Server, Access Point and iWRAP are registered trademarks of Bluegiga Technologies.

The *Bluetooth* trademark is owned by the Bluetooth SIG Inc., USA and is licensed to Bluegiga Technologies. All other trademarks listed herein are owned by their respective owners.

VERSION HISTORY

Version	Comment
1.0	First version

TABLE OF CONTENTS

OBEX OPP and OBEX FTP Profiles	1
iWRAP application note	1
1 Introduction	5
1.1 Object push profile	5
1.2 File transfer profile	6
2 iWRAP firmware overview	7
3 Using OPP with iWRAP	9
3.1 Configuration	9
3.1.1 OPP client	9
3.1.2 OPP Server	9
3.2 Service discovery	10
3.3 Connection	11
3.3.1 Sending a file - OPP Client	11
3.3.2 Receiving a file - OPP Server	13
4 Using FTP with iWRAP	14
4.1 Configuration	14
4.1.1 FTP client	14
4.2 Service discovery	14
4.3 Connection	15
4.3.1 Opening FTP connection	15
4.3.2 Closing FTP connection	15
4.3.3 FTP commands	16
4.3.4 Sending file using FTP	17
4.3.5 Receiving file using FTP	17
5 References	18
6 Contact Information	19

1 Introduction

This application note discusses Bluetooth Object Push Profile (OPP) and Bluetooth File Transfer Profile (FTP) their advantages and how these profiles can be utilized. Also practical examples are given how the OPP and FTP are used with the iWRAP firmware.

1.1 Object push profile

OPP defines the roles of push server and push client. These roles are analogous to and must interoperate with the server and client device roles that GOEP defines.

A common scenario would be file transfer from mobile phone to PC or another mobile phone. The OPP defines two roles, that of a Push client and a Push server unit:

- Push Server – This is the device that provides an object exchange server (in other words, it is the entity that receives a file).
- Push Client – This is the device that pushes objects to the Push Server. (Supported by iWRAP starting from version 3.1)

OPP channel works on top of RFCOMM connection and the protocol used in the link is OBEX.

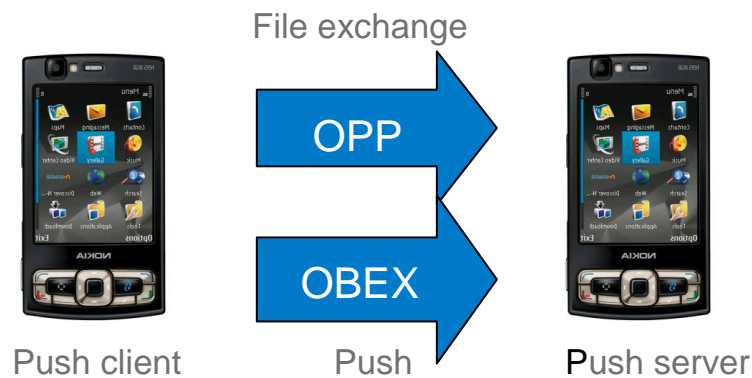


Figure 1: Typical HFP use case

1.2 File transfer profile

The HSP describes how a Bluetooth enabled headset should communicate with a computer or other Bluetooth enabled device such as a mobile phone.

FTP specification defines two roles:

- Client – Initiates connection, pushes and pulls files to and from the server. Must be also able to interpret the OBEX Folder listing Format.
- Server – Target device which needs to provide object exchange server and folder browsing capabilities using OBEX Folder Listing format. (Not supported by iWRAP)

File Transfer profile is essentially the same profile as Object Push profile while also providing possibility to fetch files from server device and moving and browsing the server's file system.

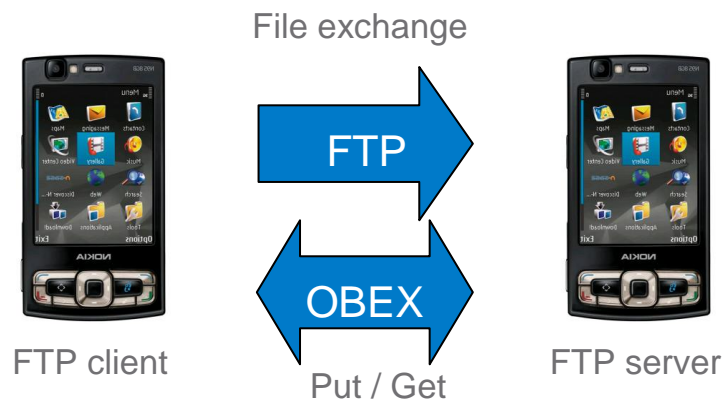


Figure 2: Typical FTP use case

2 iWRAP firmware overview

iWRAP is an embedded firmware running entirely on the RISC processor of WT12, WT22 and WT32 modules. It implements the full *Bluetooth* protocol stack and many *Bluetooth* profiles as well. All software layers, including application software, run on the internal RISC processor in a protected user software execution environment known as a Virtual Machine (VM).

The host system can interface to iWRAP firmware through one or more physical interfaces, which are also shown in the figure below. The most common interfacing is done through the UART interface by using the ASCII commands that iWRAP firmware supports. With these ASCII commands, the host can access *Bluetooth* functionality without paying any attention to the complexity, which lies in the *Bluetooth* protocol stack. GPIO interface can be used for event monitoring and command execution. PCM, SPDIF, I2S or analog interfaces are available for audio. The available interfaces depend on the used hardware.

The user can write application code to the host processor to control iWRAP firmware using ASCII commands or GPIO events. In this way, it is easy to develop *Bluetooth* enabled applications.

On WT32 there is an extra DSP processor available for data/audio processing.

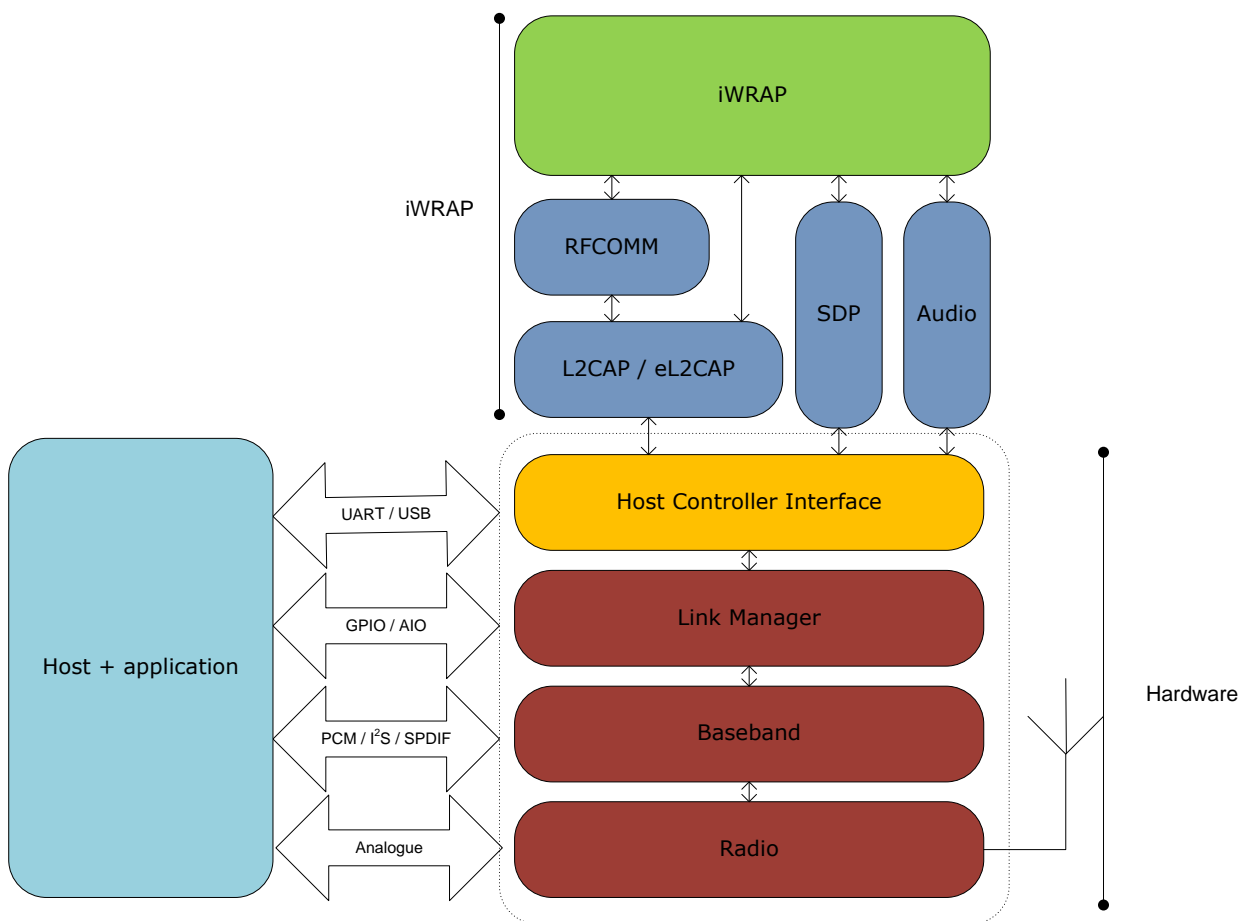


Figure 3: iWRAP Stack

In the figure above, a WRAP THOR *Bluetooth* module with iWRAP firmware could be connected to a host system for example through the UART interface. The options are:

- If the host system has a processor, software can be used to control iWRAP by using ASCII based commands or GPIO events.
- If there is no need to control iWRAP, or the host system does not need a processor, iWRAP can be configured to be totally transparent and autonomous, in which case it only accepts connections or automatically opens them.
- GPIO lines that WRAP THOR modules offer can also be used together with iWRAP to achieve additional functionality, such as Carrier Detect or DTR signaling.
- Audio interfaces can be used to transmit audio over a *Bluetooth* link.

3 Using OPP with iWRAP

This chapter instructs the OPP usage and configuration with the iWRAP firmware.

3.1 Configuration

3.1.1 OPP client

Since OPP client establishes the connection there are no SDP records that would need to be added. Only requirement is to have the iWRAP in Multiplexing Mode (MUX). A reset is recommended after enabling the MUX mode.

Below is an example how to enable OPP client mode.

```
SET CONTROL MUX 1
Link 255: RESET
```

To start using the module in MUX mode, use of BGTerminal software is recommended.

3.1.2 OPP Server

OPP Server mode is enabled with command “**SET PROFILE OPP {service_name}**”

service_name

This parameter configures user friendly description of the device. Neither special characters nor white spaces are allowed. Service name **ON** enables the profile with the default name.

Finally a reset is needed in for the OPP Server profile to become active.

Below is an example how to enable HFP mode.

```
SET PROFILE OPP ON
RESET
```

3.2 Service discovery

Bluetooth technology enables wireless service discovery, so you can find out the capabilities the remote device supports. Wireless service discovery uses the Bluetooth Service Discovery Profile (SDP).

With iWRAP the service discovery is performed with command: “**SDP {bd_addr} {uuid}**”.

bd_addr	Bluetooth device address of the remote device.
uuid	Universally unique identifier. Refers to the Bluetooth profile one wants to discover. For OPP the uuid is 1105.

Below is an example how to perform a service discovery for OPP device.

```
SDP 00:07:80:93:0c:aa 1105
SDP 00:07:80:ff:50:05 < I SERVICENAME S "OBEX Object Push" > < I PROTOCOLDESCRIPTORLIST <
< U L2CAP > < U RFCOMM I 02 > < U OBEX > > >
SDP
```

- OBEX Object Push** = Service name
- 02** = RFCOMM channel for OPP

3.3 Connection

3.3.1 Sending a file - OPP Client

The OPP connection establishment to remote device can be done with a **CALL** command:

“CALL {bd_addr} 1105 OPP”

bd_addr Bluetooth device address of the remote device.

Below is an example how to set up an OPP connection from iWRAP.

```
LINK 255: CALL 00:07:80:93:0c:aa 1105 OPP
LINK 255: CALL 0
LINK 255: CONNECT 0 OPP 2
LINK 255: OBEX 0 READY
```

A typical indications of outgoing call and successful connection are received (CALL and CONNECT). Soon after the CONNECT event also “OBEX {link_id} READY” message should be received from the iWRAP. Now it is possible to start sending files.

To send files we first need to define the file size, name and MIME type. This is done using **PUT** command:

“PUT {file_size} {MIME_type} {filename}”

file_size	File size in bytes
MIME_type	MIME type of the file
filename	filename for the file that you are sending


List of different possible MIME types can be found from <http://www.iana.org/assignments/media-types/>

After the file parameters are defined and “OBEX {link_id} SEND” event is received we can start sending the actual data. This can be done by sending file_size bytes to the Bluetooth link whose identifier (link_id) was received in the CALL and CONNECT events as a first parameter. In our example this identifier was 0 so the same will be also used in the following continuing example:

```
LINK 255: PUT 10 text/plain testfile.txt
LINK 255: OBEX 0 SEND
LINK 0: 0123456789
LINK 255: OBEX 0 OK
```

NOTE: If you have larger file than single MUX frame can reliably fit inside which is about 200 bytes, you need to split the data into multiple MUX frames.

If you wish to send more files you can rotate this PUT – SEND routine as many times as you like. When you want to close the connection use the DISCONNECT command.

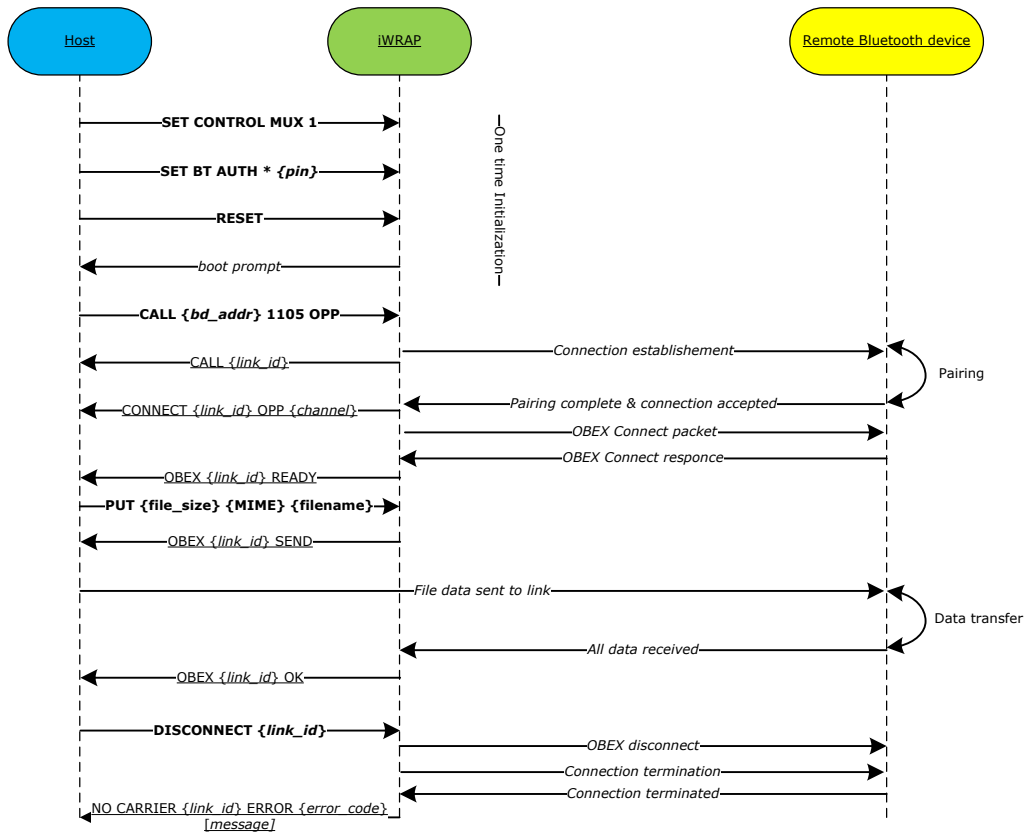

3.3.2 Receiving a file - OPP Server

When another device initiates OPP connection to the module you will receive RING event from the iWRAP interface.

```
RING 0 00:18:42:f1:a5:4d 2 OPP
```

Where first parameter indicates the link_id given for the connection and third parameter indicated the local service channel where the OPP service is running.

After receiving the RING event you should see the actual OBEX packets arriving. Simple instruction how to interpret the OBEX format is presented in table below. All field IDs that you don't understand you can ignore. Essential part is in field which starts with byte 0x48 or 0x49 is the whole file fits into single field.

Field explanation	PUT	Length	Filename field ID	Filename length	Filename	Filedata field ID	Filedata length	Filedata
Not last packet	0x02	X	0x01	Y		0x48	Z	
Last packet	0x82	X	0x01	Y		0x49	Z	
Field size	1 byte	2 bytes	1byte	2 bytes	Y bytes	1 byte	2 bytes	Z-3 bytes
Mandatory/Optional	M	M	O	O	O	O/M	O/M	O/M
	X bytes							

For more information please see IrDA Object Exchange Protocol specification [2].

4 Using FTP with iWRAP

This chapter instructs the FTP usage and configuration with the iWRAP firmware.

4.1 Configuration

4.1.1 FTP client

iWRAP supports only FTP client mode. Since FTP client establishes the connection there are no SDP records that would need to be added. Only requirement is to have the iWRAP in Multiplexing Mode (MUX). A reset is recommended after enabling the MUX mode.

Below is an example how to enable FTP client mode.

```
SET CONTROL MUX 1
Link 255: RESET
```

To start using the module in MUX mode, use of BGTerminal software is recommended.

4.2 Service discovery

Bluetooth technology enables wireless service discovery, so you can find out the capabilities the remote device supports. Wireless service discovery uses the Bluetooth Service Discovery Profile (SDP).

With iWRAP the service discovery is performed with command: “**SDP {bd_addr} {uuid}**”.

bd_addr	Bluetooth device address of the remote device.
uuid	Universally unique identifier. Refers to the Bluetooth profile one wants to discover. For FTP the uuid is 1106.

Below is an example how to perform a service discovery for FTP device.

```
SDP 00:07:80:93:0c:aa 1106
SDP 00:07:80:ff:50:05 < I SERVICENAME S "OBEX File Transfer" > < I PROTOCOLDESCRIPTORLIST
< < U L2CAP > < U RFCOMM I 02 > < U OBEX > > >
SDP
```

OBEX File Transfer	= Service name
02	= RFCOMM channel for FTP

4.3 Connection

4.3.1 Opening FTP connection

The FTP connection establishment to remote device can be done with a **CALL** command:

“CALL {bd_addr} 1106 FTP”

bd_addr Bluetooth device address of the remote device.

Below is an example how to set up an FTP connection from iWRAP.

```
LINK 255: CALL 00:07:80:93:0c:aa 1106 FTP  
LINK 255: CALL 0  
LINK 255: CONNECT 0 FTP 2  
LINK 255: OBEX 0 READY
```

A typical indications of outgoing call and successful connection are received (CALL and CONNECT). Soon after the CONNECT event also “OBEX {link_id} READY” message should be received from the iWRAP. Now it is possible to start using FTP commands.

4.3.2 Closing FTP connection

The FTP connection should be closed with a **DISCONNECT** command:

“DISCONNECT”

Disconnect command closes first the OBEX communication with set Below is an example how to close a FTP connection from iWRAP.

```
LINK 255: DISCONNECT  
LINK 255: NO CARRIER 0 ERROR 0
```

4.3.3 FTP commands

There are several commands that you can use for moving in directory tree, modifying, deleting and creating files and directories. Basically FTP provides the PUT function as OPP client but on top of that you can use all other functions listed below.

Command	Function	Return
CD {directory}	Change to directory .	"OBEX OK" or "OBEX NOT FOUND"
CDMK {directory}	Make directory and CD to it.	"OBEX OK" or "OBEX NOT FOUND"
CDUP	Go one directory level up.	"OBEX OK" or "OBEX NOT FOUND"
DEL {object}	Removes on object . (file or directory)	"OBEX OK" or "OBEX NOT FOUND"
DIR	Directory	Directory listing (in XML)
GET {file_name}	Download file with name file_name .	File data in MUX frames
LS	Alias to DIR	Directory listing (in XML)
PUT {size} {mime} {filename}	Start OBEX transmission for file with name file_name .	"OBEX OK" after {size} bytes is successfully transferred
RD {object}	Alias to RMDIR	"OBEX OK" or "OBEX NOT FOUND"
RM {object}	Alias to DEL	"OBEX OK" or "OBEX NOT FOUND"
RMDIR {object}	Removes on object . (file or directory)	"OBEX OK" or "OBEX NOT FOUND"

4.3.4 Sending file using FTP

To upload file to remote device you need to use the PUT command. Please refer to 3.3.1 Sending a file - OPP Client.

4.3.5 Receiving file using FTP

To download a file using FTP you need to use the GET command. File is received in OBEX format. Simple instruction how to interpret the OBEX format is presented in table below. All field IDs that you don't understand you can ignore. Essential part is in field which starts with byte 0x48 or 0x49 is the whole file fits into single field.

Field explanation	GET	Length	Filename field ID	Filename length	Filename	Filedata field ID	Filedata length	Filedata
Not last packet	0x90	X	0x01	Y		0x48	Z	
Last packet	0xa0	X	0x01	Y		0x49	Z	
Field size	1 byte	2 bytes	1byte	2 bytes	Y bytes	1 byte	2 bytes	Z-3 bytes
Mandatory/Optional	M	M	O	O	O	O/M	O/M	O/M
	X bytes							

For more information please see IrDA Object Exchange Protocol specification [2].

5 References

- [1] MIME Media Types <http://www.iana.org/assignments/media-types/>
- [2] IrDA OBEX Specification <http://www.irda.org/>

6 Contact Information

Sales: sales@bluegiga.com

Technical support: support@bluegiga.com
<http://www.bluegiga.com/techforum/>

Orders: orders@bluegiga.com

Head Office / Finland:

Phone: +358-9-4355 060

Fax: +358-9-4355 0660

Street Address:

Sinikalliontie 5A

02630 ESPOO

FINLAND

Postal address:

P.O. BOX 120

02631 ESPOO

FINLAND

Sales Office / USA:

Phone: (781) 556-1039

Bluegiga Technologies, Inc.

99 Derby Street, Suite 200 Hingham, MA 02043